




GS

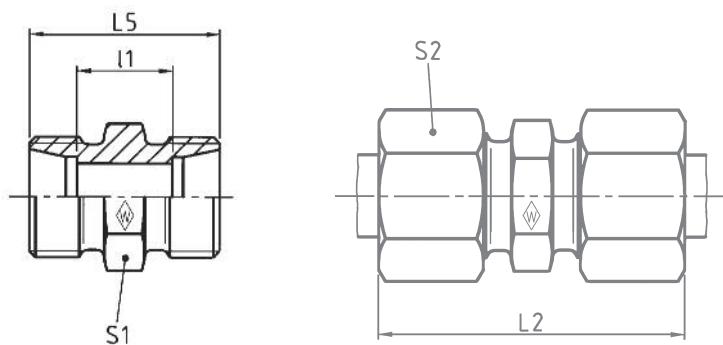

Series	bar	Tube OD	Type	Reference	kg per 100 pcs.	L ₂	L ₅	l ₁	S ₁	S ₂
Reihe	PN	Rohr-AD	Typ	Best.-Nr.	kg per 100 St.					
Série	(psi)	Tube Ø ext.	Désignation	Réf.	kg par 100 p.					
LL	100 (1450)	4	GS 4 LL	WAL037844	0,6	31	20	12	9	10
		6	GS 6 LL	WAL037846	0,7	32	20	9	11	12
		8	GS 8 LL	WAL037847	1,1	35	23	12	12	14
L	500 (7252)	6	GS 6 L	WAL037848	1,3	39	24	10	12	14
		8	GS 8 L	WAL037849	1,7	40	25	11	14	17
		10	GS 10 L	WAL037850	2,5	42	27	13	17	19
	400 (5801)	12	GS 12 L	WAL037851	2,8	43	28	14	19	22
		15	GS 15 L	WAL037852	4,8	46	30	16	24	27
		18	GS 18 L	WAL028736	6,6	48	31	16	27	32
	250 (3626)	22	GS 22 L	WAL028737	8,9	52	35	20	32	36
		28	GS 28 L	WAL028738	13,5	54	36	21	41	41
		35	GS 35 L	WAL028739	21,2	63	41	20	46	50
		42	GS 42 L	WAL028740	29,2	66	43	21	55	60
S	800 (11603)	6	GS 6 S	WAL037853	2,5	45	30	16	14	17
		8	GS 8 S	WAL037854	2,9	47	32	18	17	19
		10	GS 10 S	WAL037855	4,3	49	32	17	19	22
	630 (9137)	12	GS 12 S	WAL037856	6,0	51	34	19	22	24
		14	GS 14 S	WAL037857	7,5	57	38	22	24	27
		16	GS 16 S	WAL037858	8,7	57	38	21	27	30
	420 (6091)	20	GS 20 S	WAL037859	14,2	66	44	23	32	36
		25	GS 25 S	WAL037860	24,9	74	50	26	41	46
		30	GS 30 S	WAL037861	32,8	80	54	27	46	50
		38	GS 38 S	WAL037862	54,0	90	61	29	55	60

L₂ = approximate length with nut tightened
L₂ = Ungefährmaß bei angezogener Überwurfmutter
L₂ = longueur approximative, l'écrou étant bloqué