


HT 80

Good adhesion on wood, PVC, PMMA ...

Technical Properties:	Use:	multipurpose
	Colour:	transparent
	Base:	EVA
	Viscosity [200°C]:	ca. 27 dPa·s
	Softening point:	ca. 86 °C
	Open time:	middle
	Working temperature:	150 – 190 °C

Properties:

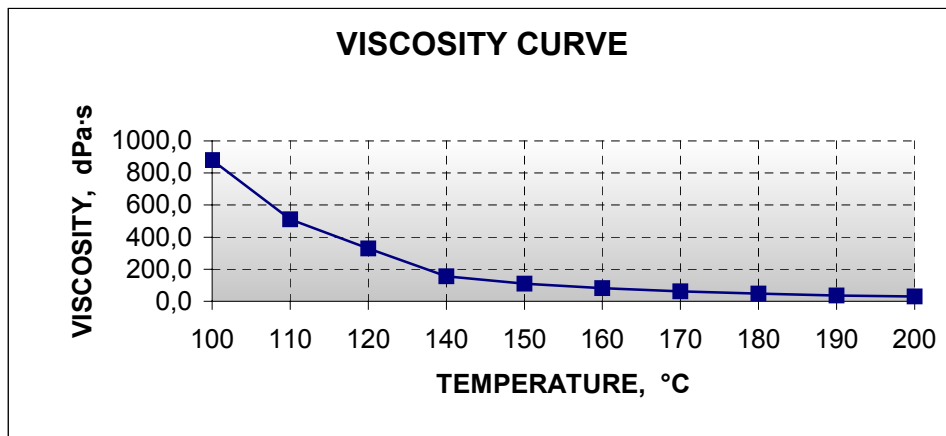

Storage:

Maxi storage temperature 30 °C.
Storage life 3 years (take shelter of the light)

Remark:

All statements, technical information and recommendations contained herein are based on tests we believe to be reliable but the accuracy or completeness is not guaranteed, and the user should determine the suitability of the product for the intended use. We disclaims any responsibility for any warranties of merchantability and fitness for purpose, verbal recommendations of its representatives and consequential damages.