




HEAVY-DUTY V-BELTS

SUPER HC® & HI-POWER® POWERBAND®

Wrapped, narrow section/classical section multiple V-belt

Gates Super HC® PowerBand® and Hi-Power® PowerBand® offer a solution for drives where single belts vibrate, turn over or jump off the pulleys. They consist of several V-belts joined together by a permanent, high strength tie band, thus being tougher than all the belts taken separately.

Super HC® PowerBand® is available in SPB, SPC, 8V/25J, 9J and 15J sections. Hi-Power® B, C and D sections are available on request.

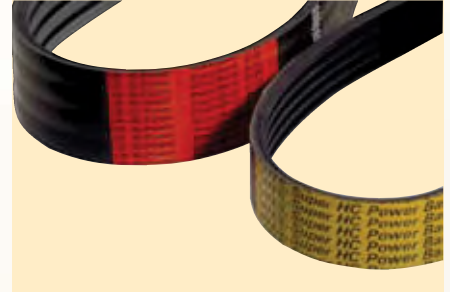

Identification

Durable marking indicating type and dimensions.


Construction

- Strong band controls belt-to-belt distance and prevents sideways bending.
- Flex-bonded tensile cords are vulcanised as one solid unit making the belt highly resistant to tensile and flexing forces, fatigue and shock loads.
- Concave sides and arched top.
- Flex-Weave® cover protects the belt core from the toughest environments.
- Elastomeric compound protects the belt against heat, ozone and sunlight.
- **Static conductive (ISO 1813)** and can as such be used in the conditions described in the Directive 94/9/EC - ATEX.

Advantages

- Better resistance to vibrations.
- High stability and smooth running on the toughest drives.
- Temperature ranges from -30°C to +60°C.
- Important design economies possible.
- Savings in drive space and weight thanks to high transmission efficiency.

Sections and nominal dimensions



	Pitch mm	Width mm	Height mm
Super HC®			
SPB	19.00	16	13
SPC	25.50	22	18
9J/3V	10.30	10	8
15J/5V	17.50	16	13
25J/8V	28.60	26	23
Hi-Power®			
B	19.05	17	10
C	25.40	22	12
D	36.50	32	19

Available number of ribs		
Super HC®		
SPB	2 →	16
SPC	2 →	12
9J/3V	2 →	30
15J/5V	2 →	16
25J/8V	3 →	5
Hi-Power®		
B	2 →	5
C	2 →	5
D	3 →	5



SPB		9J/3V		15J/5V		25J/8V	
Description	Datum length*	Description	Effective length	Description	Effective length	Description	Effective length
	mm		mm		mm		mm
SPB2120	2120	9J1250	1250	15J1250	1250	8V1000	2540
SPB2240	2240	9J1320	1320	15J1320	1320	8V1060	2692
SPB2360	2360	9J1400	1400	15J1400	1400	8V1120	2845
SPB2500	2500	9J1500	1500	15J1500	1500	8V1180	2997
SPB2650	2650	9J1600	1600	15J1600	1600	8V1250	3175
SPB2800	2800	9J1700	1700	15J1700	1700	8V1320	3355
SPB3000	3000	9J1800	1800	15J1800	1800	8V1400	3556
SPB3150	3150	9J1900	1900	15J1900	1900	8V1500	3810
SPB3350	3350	9J2000	2000	15J2000	2000	8V1600	4064
SPB3550	3550	9J2120	2120	15J2120	2120	8V1700	4318
SPB3750	3750	9J2240	2240	15J2240	2240	8V1800	4572
SPB4000	4000	9J2360	2360	15J2360	2360	8V1900	4826
SPB4250	4250	9J2500	2500	15J2500	2500	8V2000	5080
SPB4500	4500	9J2650	2650	15J2650	2650	8V2120	5385
SPB4750	4750	9J2800	2800	15J2800	2800	8V2240	5690
SPB5000	5000	9J3000	3000	15J3000	3000	8V2360	5994
SPB5300	5300	9J3150	3150	15J3150	3150	8V2500	6350
SPB5600	5600	9J3350	3350	15J3350	3350	8V2650	6731
SPB6000	6000	9J3550	3550	15J3550	3550	8V2800	7112
SPB6300	6300			15J3750	3750	8V3000	7620
SPB6700	6700			15J4000	4000	8V3150	8001
SPB7100	7100			15J4250	4250	8V3350	8509
SPB7500	7500			15J4500	4500	8V3550	9017
SPB8000	8000			15J4750	4750	8V3750	9525
				15J5000	5000	8V4000	10160
				15J5300	5300	8V4250	10795
				15J5600	5600	8V4500	11430
				15J6000	6000	8V4750	12065
				15J6300	6300	8V5000	12700
				15J6700	6700	8V5600	14224
				15J7100	7100	8V6000	15240
				15J7500	7500		
				15J8000	8000		
				15J8500	8500		
				15J9000	9000		

SPC	
Description	Datum length*
	mm
SPC3000	3000
SPC3150	3150
SPC3350	3350
SPC3550	3550
SPC3750	3750
SPC4000	4000
SPC4250	4250
SPC4500	4500
SPC4750	4750
SPC5000	5000
SPC5300	5300
SPC5600	5600
SPC6000	6000
SPC6300	6300
SPC6700	6700
SPC7100	7100
SPC7500	7500
SPC8000	8000
SPC8500	8500
SPC9000	9000
SPC10000	10000
SPC10600	10600
SPC11200	11200

NOTES

* Dimensions according to ISO 4184.

9J / 15J / 25J are ISO standards for RMA 3V-PB / 5V-PB / 8V-PB.

8V PowerBand® belts are designed for use both in 8V and 25J pulleys.

Super HC® PowerBand® ordering code is composed as follows:

9J1250/2

- 9J** - Section
- 1250** - Effective length (mm)
- 2** - Number of ribs

Dimensions in bold are available from stock.



B		B		C		D	
Description	Effective length	Description	Effective length	Description	Effective length	Description	Effective length
	mm		mm		mm		mm
B35	935	B112	2891	C60	1598	D120	3132
B38	1011	B120	3094	C68	1801	D144	3741
B42	1113	B124	3195	C75	1979	D158	4097
B43	1138	B128	3297	C81	2131	D173	4478
B46	1214	B133	3424	C85	2233	D180	4656
B48	1265	B136	3500	C90	2360	D195	5037
B50	1316	B144	3780	C96	2512	D210	5418
B51	1341	B148	3805	C99	2588	D225	5735
B52	1367	B154	3957	C100	2614	D240	6116
B53	1392	B158	4059	C105	2741	D255	6497
B54	1417	B162	4161	C108	2817	D270	6878
B55	1443	B173	4440	C109	2842	D285	7259
B56	1468	B180	4618	C112	2918	D300	7640
B57	1494	B195	4999	C120	3122	D315	8021
B58	1519	B210	5380	C124	3223	D330	8402
B59	1544	B225	5723	C128	3325	D345	8783
B60	1570	B240	6104	C136	3528	D360	9164
B61	1595	B255	6485	C144	3731	D390	9926
B62	1621	B270	6866	C158	4087	D420	10688
B63	1646	B300	7628	C162	4188	D450	11450
B64	1671	B315	8009	C173	4468	D480	12212
B65	1697			C180	4646	D540	13736
B66	1722			C195	5027	D600	15260
B67	1748			C210	5408	D660	16784
B68	1773			C225	5738		
B70	1824			C240	6119		
B71	1849			C255	6500		
B72	1875			C270	6881		
B73	1900			C285	7262		
B74	1925			C300	7643		
B75	1951			C315	8024		
B77	2002			C330	8405		
B78	2027			C345	8786		
B79	2052			C360	9167		
B80	2078			C390	9929		
B81	2103			C420	10688		
B82	2129						
B83	2154						
B84	2180						
B85	2205						
B86	2230						
B87	2256						
B88	2281						
B90	2332						
B92	2383						
B93	2408						
B94	2434						
B95	2459						
B96	2484						
B97	2510						
B99	2560						
B100	2586						
B103	2662						
B105	2713						
B108	2789						
B110	2840						

Hi-Power® PowerBand® ordering code is composed as follows:

C270/2

- C** - Section
- 270** - Effective length in inch
- 2** - Number of ribs

All dimensions are available on request.